

# Gas Injection Process

Injecting and intermixing an **Non-Combustible Gas (D)** (non-burnable gas) with the '**Burnable Gas-Mixture (B)**' "changes" or "alters" the gas-mixture "**Burn-Rate**".

Ir  
th

**Gas (D)** diminishes and/or lowers  
r.

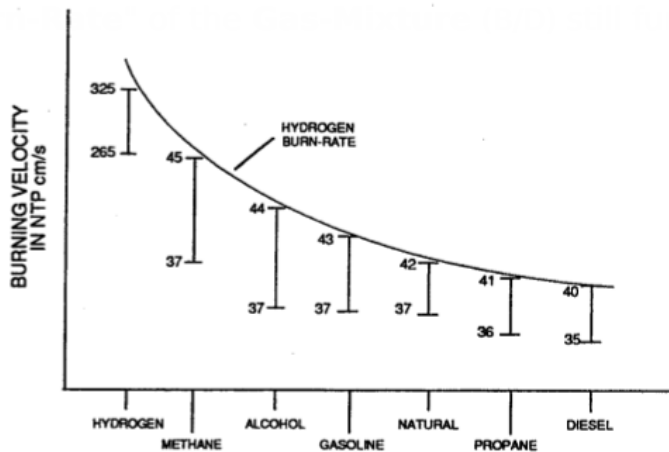


FIGURE 2-2: HYDROGEN BURN RATE

Progressive and controlled

intermixing of the non-combustible gases (B/D) allowed the "Burn-Rate" of Hydrogen to be "lowered" or "adjusted" to "match" or ... co-equal the "Burn-Rate" of other **Fuel-Gases**, see curve line in Figure (2-2).

In terms of operational performance, the **Non-Burnable Gas (D)** does "Not" support the **Combustion Process** since the **Non-Burnable Gas (D)** "restricts" or "retards" the speed at which the **Oxygen Atom** unites with **Hydrogen Atoms** to cause **Gas Combustion**.

The "**Gas Retarding Process**" is, of course, applicable to any type or combination of **Burnable Gases** or **Burnable gas-mixture**.

---

Revision #2

Created 19 December 2023 04:51:22 by Chris Bake

Updated 20 December 2023 04:43:51 by Chris Bake