

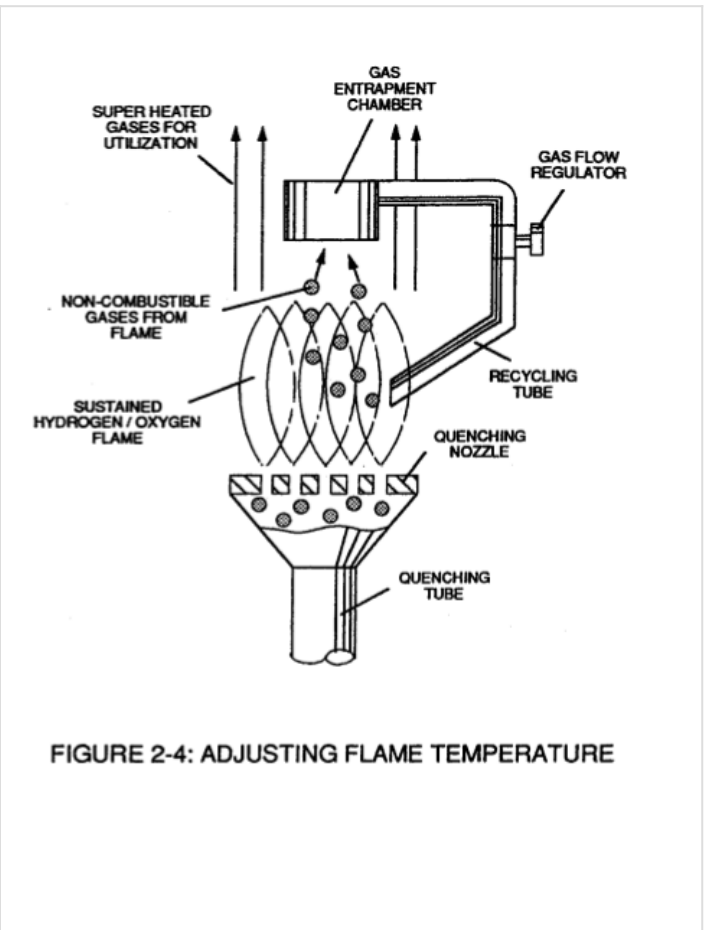


Quenching Circuit

Spark-Ignition of the **Fuel-Cell** gases (B/D) is prevented when the "**Gas Retarding Process**" is used in conjunction with a "**Quenching Circuit**", as illustrated in Figure (2-3), (2-4), (2-5) and (2-6).

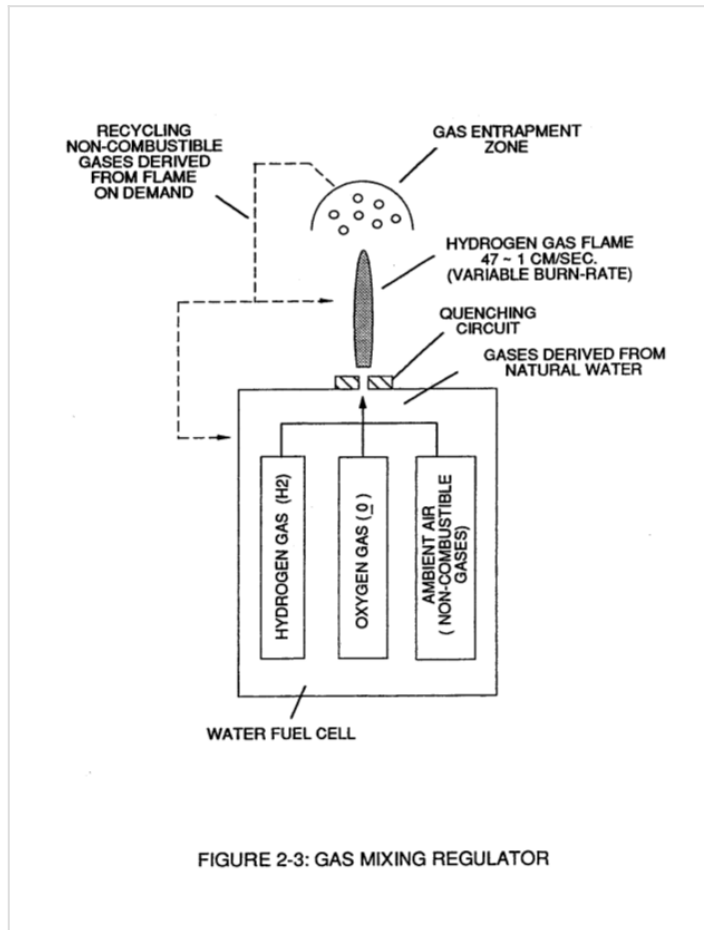

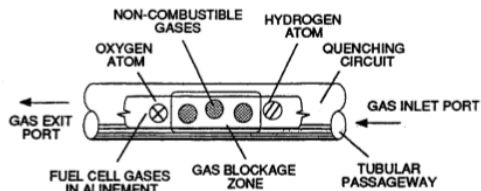

NOTE:

- 1) OXYGEN ATOM MUST UNITE WITH HYDROGEN ATOMS TO CAUSE GAS IGNITION.
- 2) TUBULAR PASSAGEWAY PREVENTS MOVING GAS ATOMS FROM REGROUPING.

FIGURE 2-5: PREVENTING GAS IGNITION

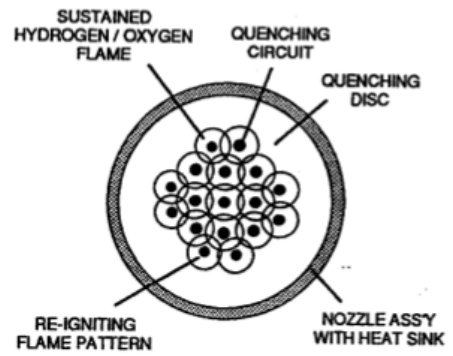


FIGURE 2-6: QUENCHING NOZZLE

The non-combustible gases (D) separates and prevents the hydrogen atoms to unite with oxygen atoms to "bring-on" or "initiate" **Gas-Ignition**.

The narrow passageway (at least $1/8$ inch long and having a .015 diameter) prevents the moving gas atoms from "Re-Grouping".

The alignment of the Fuel-Cell gases (*BID*) inside the tubular-passageway is, hereinafter, called "**The Quenching Circuit**".

The **Quenching Circuit** "Anti-Spark technique" is "independent" of both **Gas-Velocity** and **Gas-Pressure**.

Revision #2

Created 2023-12-19 04:52:03 UTC by Chris Bake

Updated 2023-12-20 04:43:51 UTC by Chris Bake