


Voltage Amplitude Switch-Off

Voltage levels of variance (V_a xxx V_n) is achieved by simply switching-in or switching-out the member of **Secondary Coil-cavities** (505a xx 505n) (see 740 of Figure 7-13) in direct relationship to **Taper Resonant Voltage surfaces** (E9/10) of Figure (6-2) which acts and performs as a "**Voltage Amplifier**" when **Compressional Wave-form** (B) of Figure (7-12) is intensified at **Exit Port** (32) of Figure (6-2).

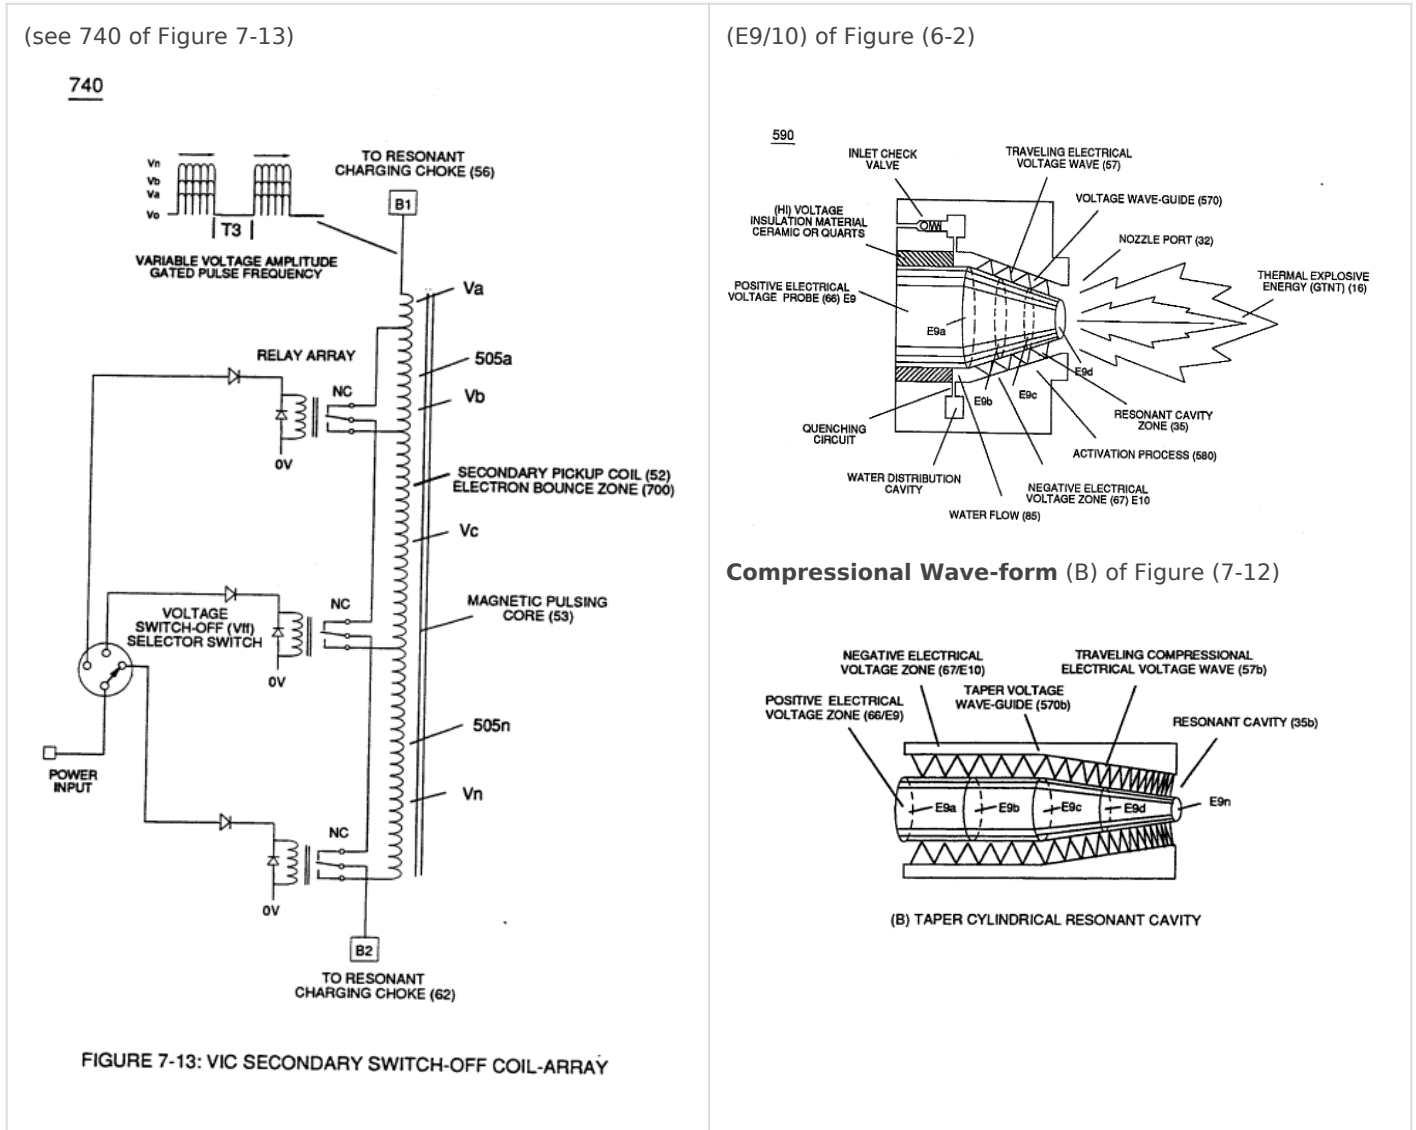

Switching the member of **Secondary Coil-Array** (505a xxx 505n) maximizes electrical power transfer from **Primary Coil** (26) to **Secondary Coil** (52) by keeping **Voltage Amplitude of Pulse-train** (49a xx 49n - T3 - 49a xxx 49n) constant.

Updated 2023-12-20 04:43:51 UTC by Chris Bake