


# Voltage Intensifier Coil-Assembly

**Activation Process** (590) of Figure (6-2) as to (100) of Figure (4-8) is achieved since amp flow is restricted to enter into **Voltage Triggering Process** (70) of Figure (4-5) by way of **voltage intensifier coil-assembly** (580) of Figure (6-1).

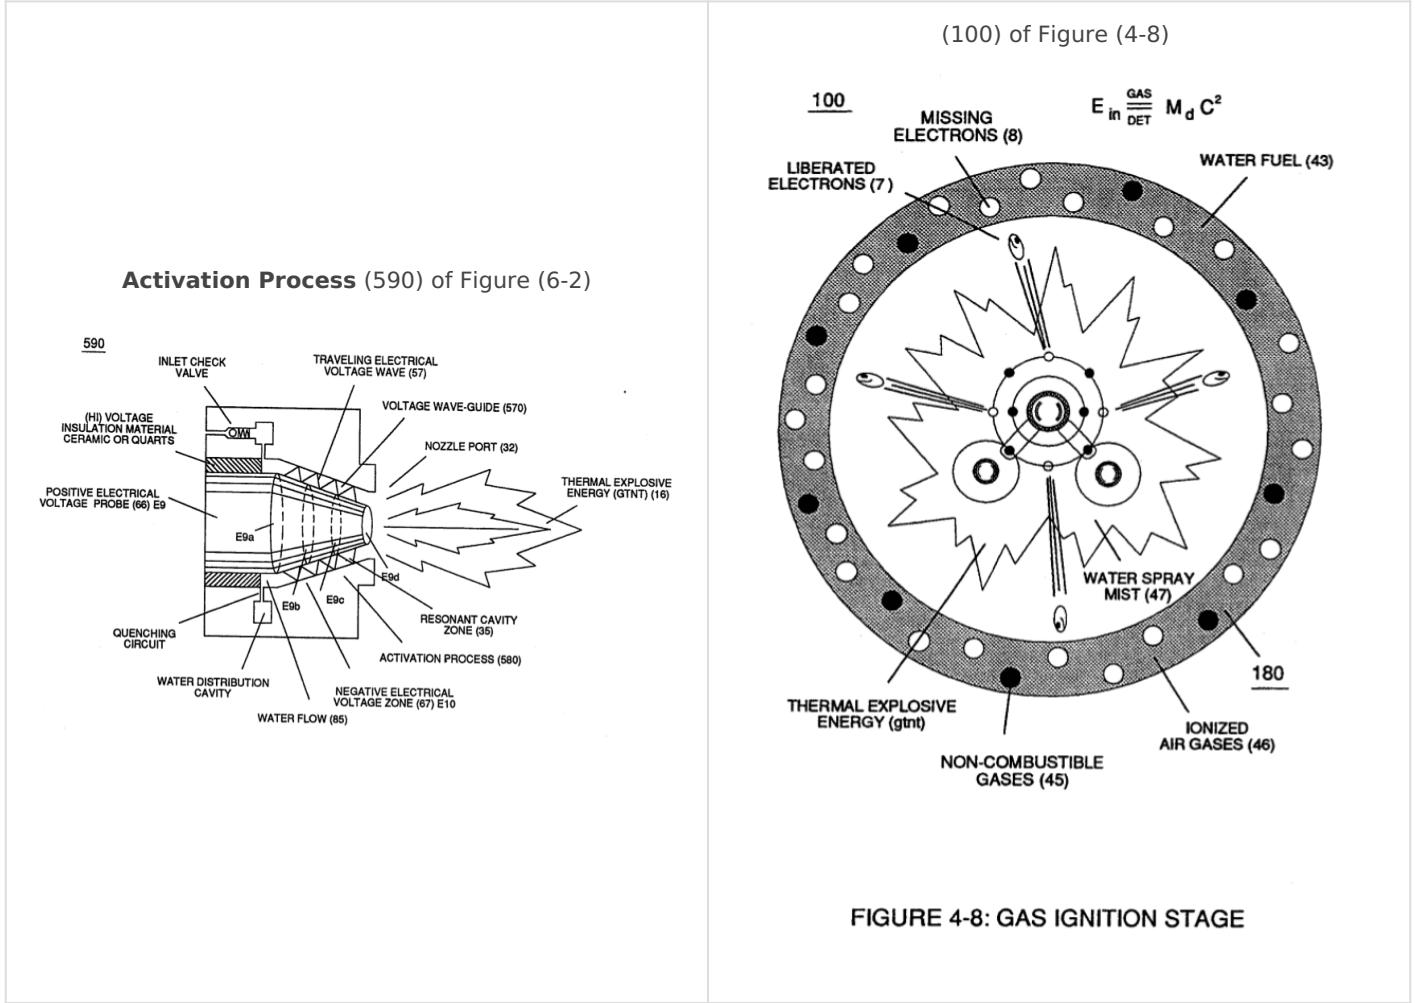

## Voltage Triggering Process (70) of Figure (4-5)

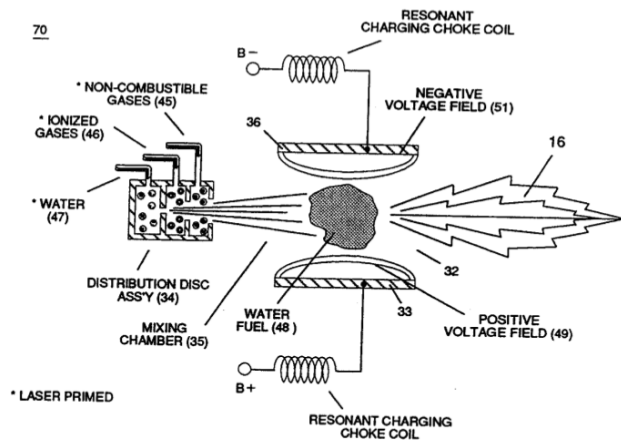


FIGURE 4-5: VOLTAGE TRIGGERING

## voltage intensifier coil-assembly (580) of Figure (6-1)

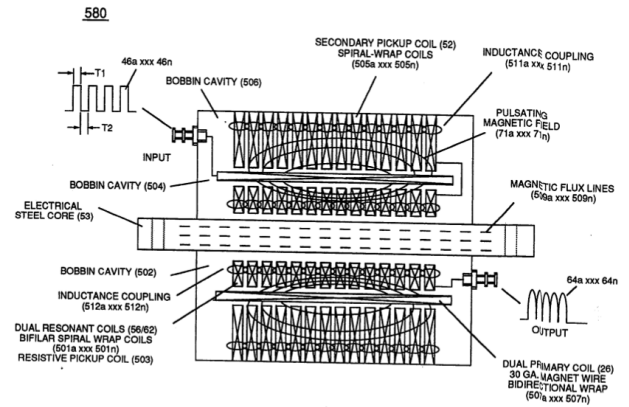


FIGURE 6-1: (VIC) COIL ASSEMBLY

Inherently, the design parameters of **coil-structures (580)** of Figure (6-1) determines "**Efficiency**" (minimizing amp leakage) by which "**Voltage Intensity of Opposite Potential**" (600) of Figure (6-3) can perform work to trigger **Hydrogen Fracturing Process (520)** of Figure (5-3) (Memo WFC 424 DA) as to (100) of Figure (4-8) (Memo WFC 423DA), as graphically denoted in (750) of Figure (7-14) of WFC memo (426) titled VIC Matrix Circuit - Instant Explosion of Water.

## coil-structures (580) of Figure (6-1)

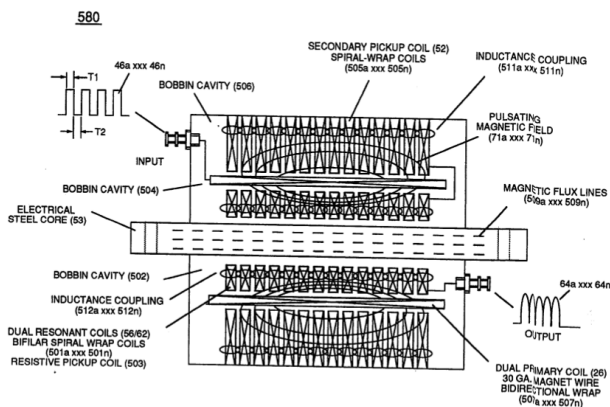


FIGURE 6-1: (VIC) COIL ASSEMBLY

## "Voltage Intensity of Opposite Potential" (600) of Figure (6-3)

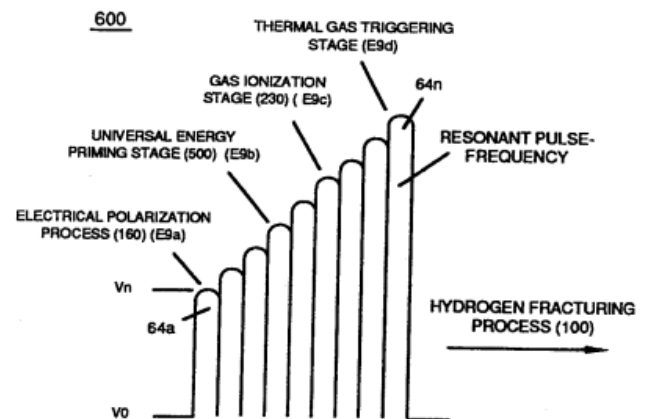


FIGURE 6-3: DYNAMIC VOLTAGE POTENTIAL

## Hydrogen Fracturing Process (520) of Figure (5-3)

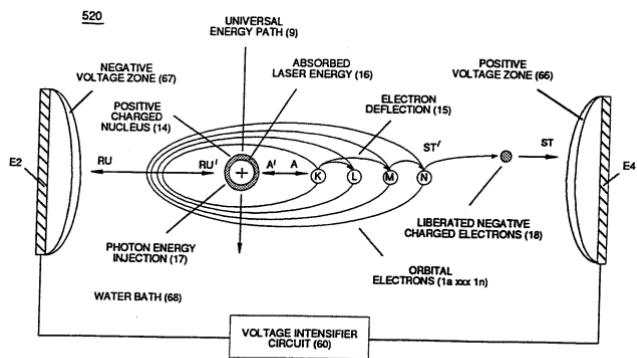


FIGURE 5-3: ENERGY PUMPING ACTION

(100) of Figure (4-8)

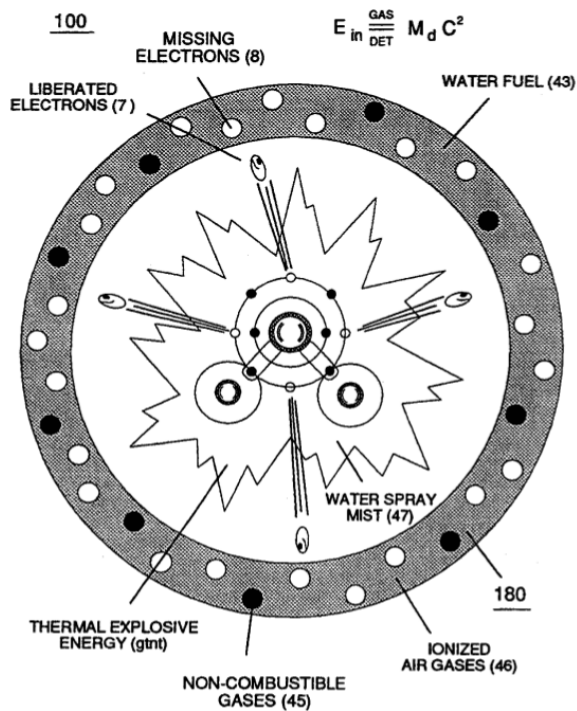


FIGURE 4-8: GAS IGNITION STAGE

Revision #4

Created 19 December 2023 05:40:14 by Chris Bake

Updated 22 December 2023 08:21:35 by Chris Bake