


Voltage Intensifier Coil-Assembly

Activation Process (590) of Figure (6-2) as to (100) of Figure (4-8) is achieved since amp flow is restricted to enter into **Voltage Triggering Process** (70) of Figure (4-5) by way of **voltage intensifier coil-assembly** (580) of Figure (6-1).

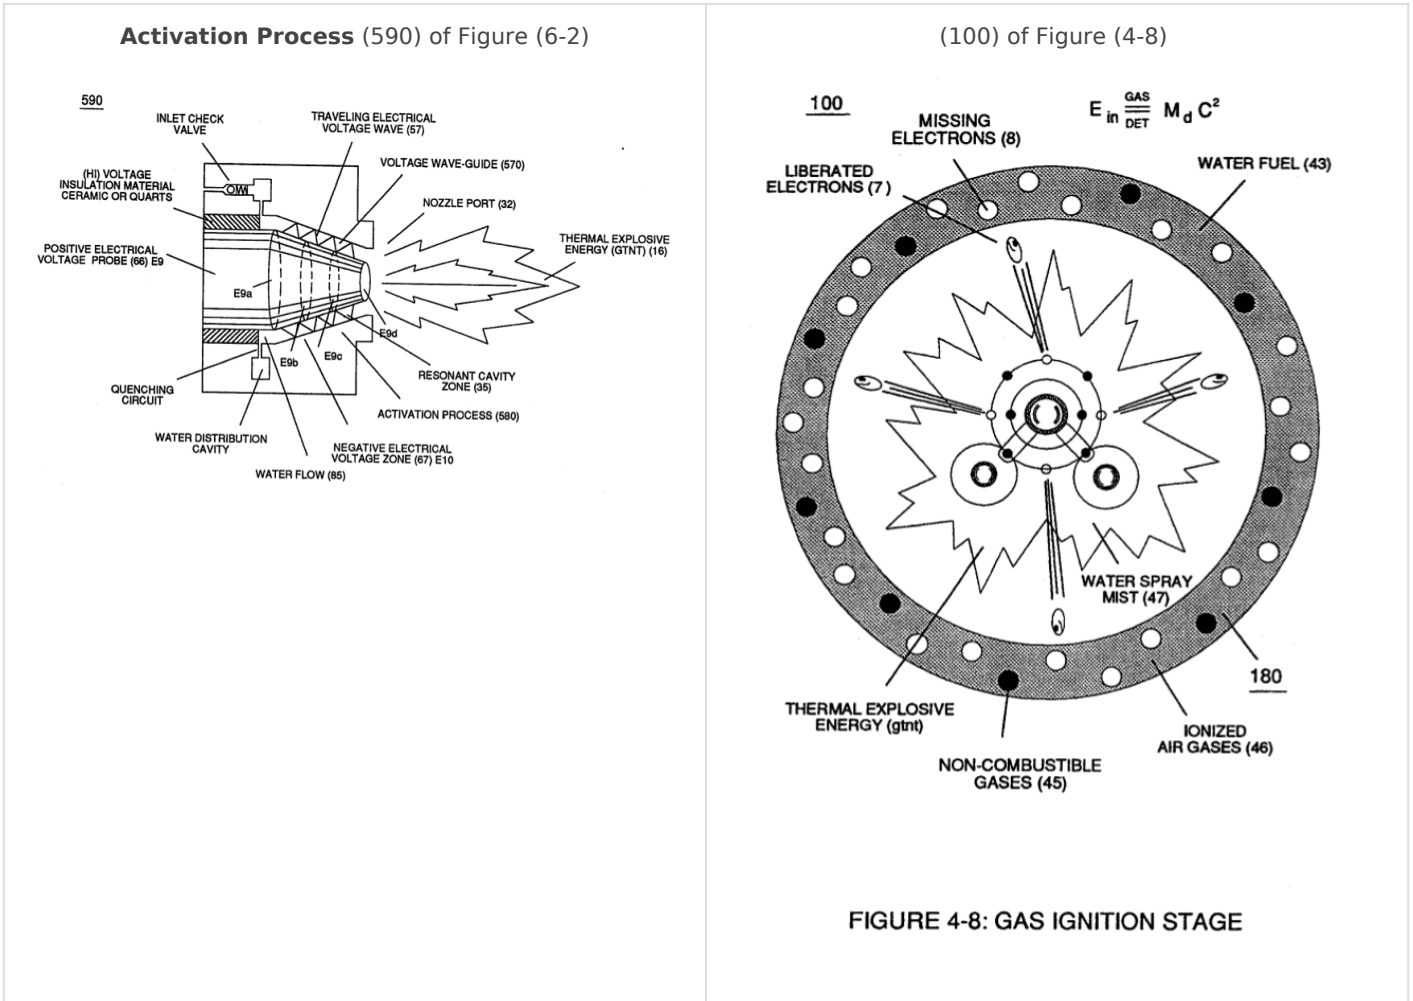

Voltage Triggering Process (70) of Figure (4-5)

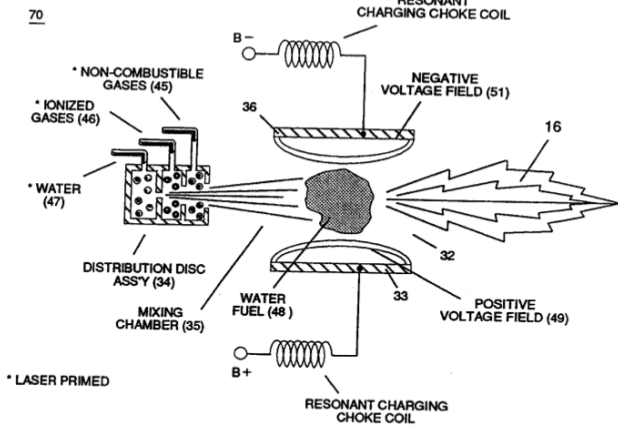


FIGURE 4-5: VOLTAGE TRIGGERING

voltage intensifier coil-assembly (580) of Figure (6-1)

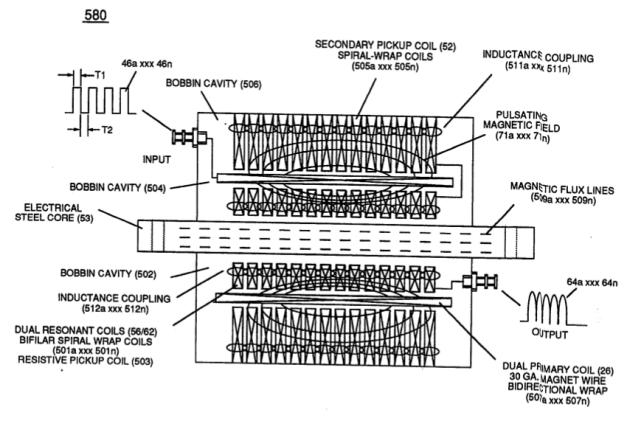


FIGURE 6-1: (VIC) COIL ASSEMBLY

Inherently, the design parameters of **coil-structures (580)** of Figure (6-1) determines "**Efficiency**" (minimizing amp leakage) by which "**Voltage Intensity of Opposite Potential**" (600) of Figure (6-3) can perform work to trigger **Hydrogen Fracturing Process (520)** of Figure (5-3) ([Memo WFC 424 DA](#)) as to (100) of Figure (4-8) ([Memo WFC 423DA](#)), as graphically denoted in (750) of Figure (7-14) of [WFC memo \(426\) titled VIC Matrix Circuit - Instant Explosion of Water](#).

coil-structures (580) of Figure (6-1)

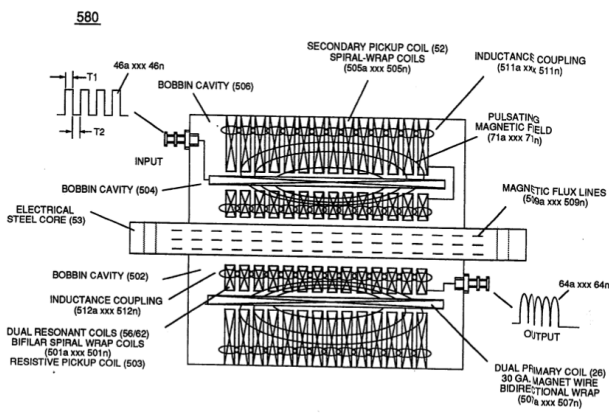


FIGURE 6-1: (VIC) COIL ASSEMBLY

"Voltage Intensity of Opposite Potential" (600) of Figure (6-3)

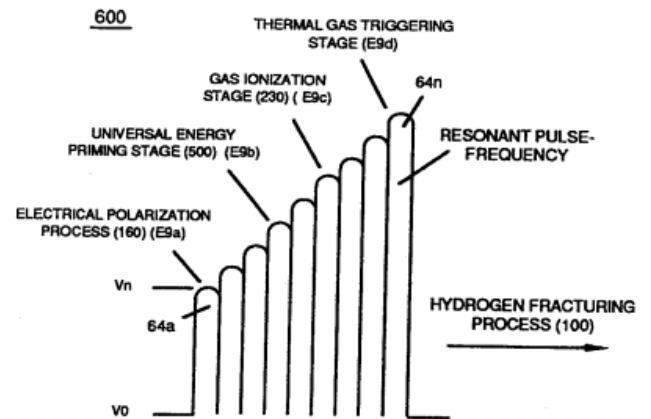


FIGURE 6-3: DYNAMIC VOLTAGE POTENTIAL

Hydrogen Fracturing Process (520) of Figure (5-3)

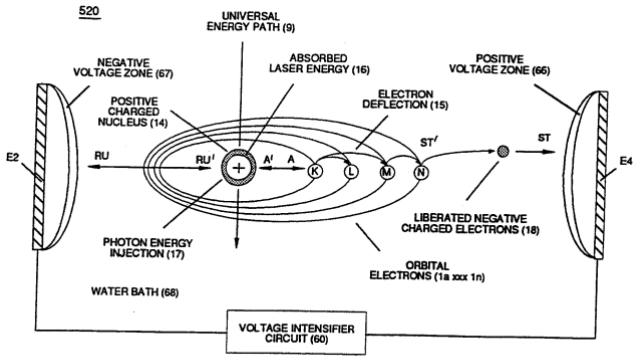


FIGURE 5-3: ENERGY PUMPING ACTION

(100) of Figure (4-8)

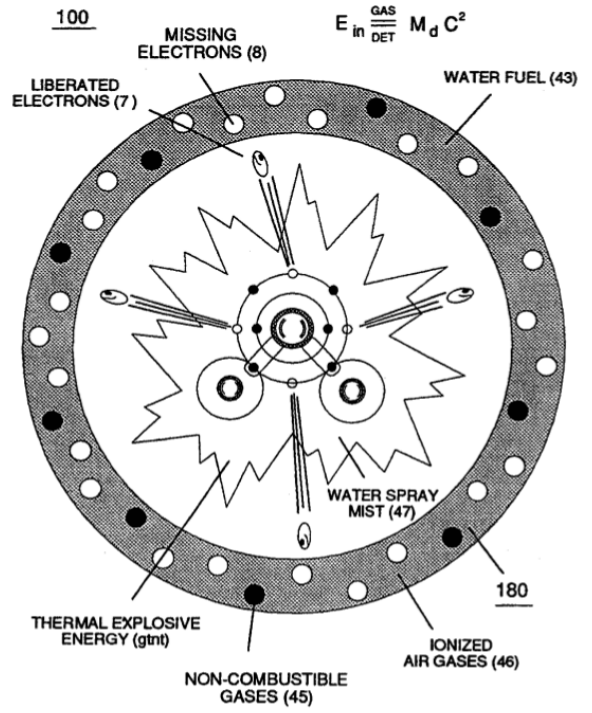


FIGURE 4-8: GAS IGNITION STAGE

Revision #4

Created 2023-12-19 05:40:14 UTC by Chris Bake

Updated 2023-12-22 08:21:35 UTC by Chris Bake