


DUAL VOLTAGE RESONANT "Q"

Electron Flow vs Voltage Amplitude vs Voltage Frequency:

In reference to Voltage Intensifier Circuit 9XA as to dual-voltage schematic 20YA and pulse voltage waveform 16A/20YA Section AA, the following operational parameters exist:

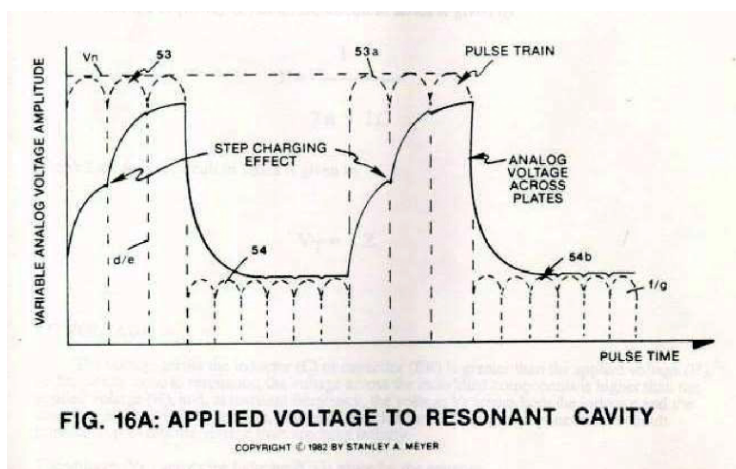

Electronic Interfacing Circuit:

- **Secondary Pickup Winding** (resistive wire coil) (42)
- **Blocking Diode** (14)
- **Resonant Charging Choke** (resistive wire coil) (43)
- **Resonant Cavity Inner Surface** (45) (forming a Positive Electrical Voltage Zone),
- **Resonant Cavity Outer Surface** (44) (forming a Negative Voltage Zone)
 - **Voltage zones surface area** (44/45) form the Capacitance value of said **Resonant Cavity Assembly** (4) of Figure 12. Natural Water inside said **Resonant Cavity Assembly** (44/45) provides the dielectric value between said **voltage zones** (44/45), **resonant charging choke** (47) to electrical ground forms and completes the **Voltage Intensifier Circuit** 9XA as to 20YA.

Voltage Potential formation.

Revision #7

Created 2024-10-15 18:27:52 UTC by Chris Bake

Updated 2024-10-21 17:35:54 UTC by Chris Bake